

Mac with two HDMI outputs

Technical setup guide • Mirrored Presenter View, separate program feed

DISPLAY ASSIGNMENT / macOS: USE AS

1920x1080 CVT (2)

Main Display

Presenter View

Integriert

Mirror 1920x1080 CVT (2)

Presenter View

1920x1080 CVT (1)

Extended Display

Program feed

SETUP

01

Connect two HDMI cables

Connect any two HDMI cables, using adapters if required. Both outputs must be detected.

02

Open Displays

macOS: System Settings › Displays.

03

Configure "Use as"

1920x1080 CVT (2) → Main Display

Built-in → Mirror 1920x1080 CVT (2)

1920x1080 CVT (1) → Extended Display

04

Configure PowerPoint

Open PowerPoint › Slide Show ›

Set Up Slide Show.

Select Presented by a speaker (full screen).

Slide show monitor: Monitor 2.

05

Start the presentation


Start the slide show and verify signal routing.

SETTINGS IN SCREENSHOTS

macOS / Displays (device names)




PowerPoint / Set Up Slide Show

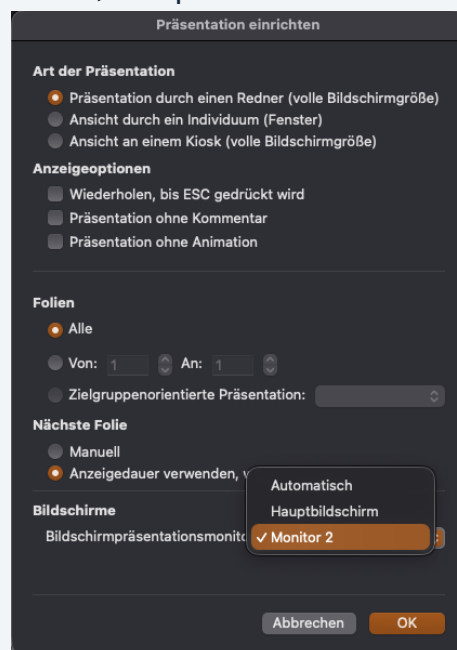

Select Monitor 2 in the dropdown

EXPECTED RESULT AT THE CONTROL DESK

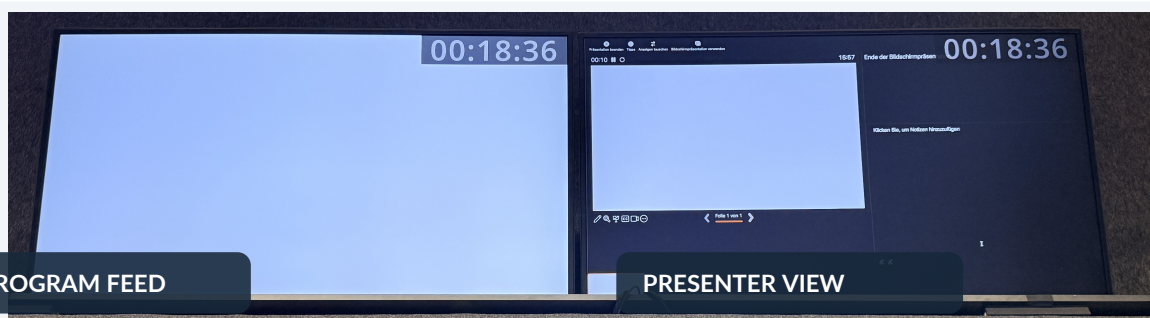

TROUBLESHOOTING

Outputs reversed?

Swap the HDMI cables at the Mac, then restart the slide show.